


Connection Guide
dLive / SQ dual system
Dante Redundant

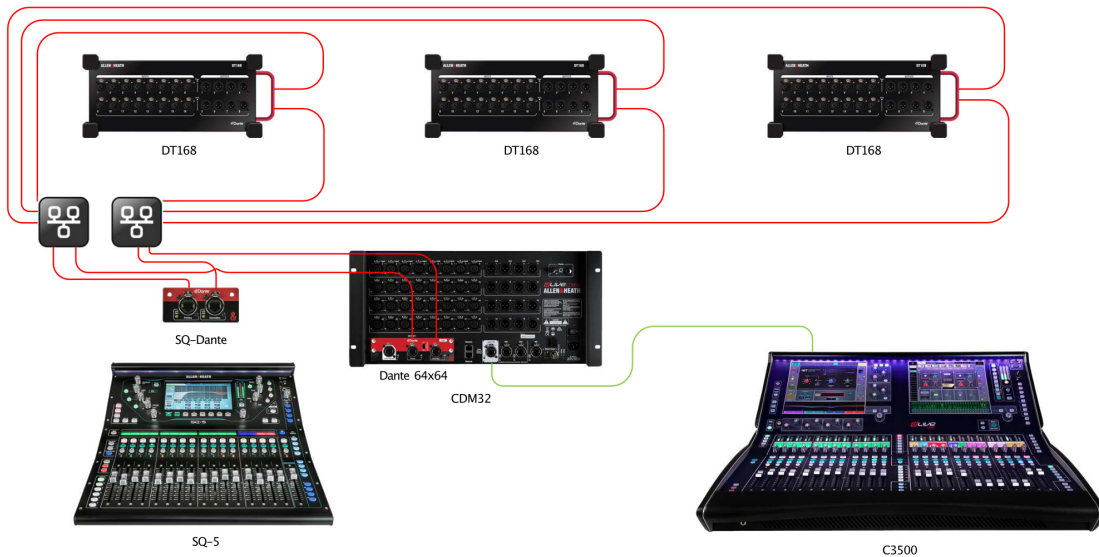

Foh - Mon system 96khz
All units in Redundant mode
Gain tracking on dLive

Legend	
	gigaACE Cat5e or higher
	DX Cat5e or higher
	Dante Cat5e or higher
	AES 110ohm 3 conductor /XLR
	Network Cat5e or higher
	ME-1 Cat5e or higher
	Analogue XLR Balanced

Please note that items may not be sized to scale.

Parts List

- One - dLive CDM32 Mixrack
- One - dLive C3500 Surface
- One - AH-M-DL-Dante64A Dante Card
- One - SQ-5
- One - AH-M-SQ-SDANTE-A Dante Card
- Three - DT168 expander boxes
- Two - Dante approved network switches

Notes

- dLive is capable of mixing up to 128 inputs x 64 outputs
- SQ is capable of mixing up to 48 inputs
- Shielded Cat5e or better is recommended.

If you have any questions please contact your local rep.
Find more drawings at www.ProTechM.com/tools