

SONANCE

COMMERCIAL SOLUTIONS



SONANCE

James
LOUDSPEAKER

I PORT

Sonance, James Loudspeaker and IPORT have been providing solutions for commercial environments for decades, delivering a unique blend of aesthetics, performance and functionality that enhance both the design and utility of any commercial space.

DESIGNED TO DISAPPEAR

Technology should disappear into architecture...this simple philosophy continues to inspire everything we do. Our hidden audio solutions deliver an even, balanced sound experience that is nothing short of magical, blending into any style, installation, or budget.

AUTHENTIC PARTNERSHIP

Every day at our home base in San Clemente, CA, you will find passionate, immensely knowledgeable people forging some of the strongest relationships in our industry. From our customer-centric culture to our not-to-be-missed Studio Seminars, we aim to define what authentic partnership looks like. Connecting our strategy and products to your company, we help unlock the most value possible for your business. [Our team is your team.](#)

A HERITAGE OF INNOVATION

The history of our independently-owned company is rooted in a deep knowledge of our customers and construction. From award-winning audio solutions to our unique TRUFIG mounting technology to our IPORT solutions that hold, charge, and protect tablets, customers rely on our culture of creativity to continue to push the boundaries of technology and design.

SONANCE PROFESSIONAL SERIES

Sonance Professional Series has become a game-changer for commercial audio, delivering clean aesthetics, excellent sonic performance, and consistent tonality across its form factors. Available in in-ceiling, pendant, and surface mount speakers, Sonance Professional Series speakers are perfect for boardrooms, retail, hotels, restaurants, houses of worship, education, gyms, casinos, car dealerships, or anywhere requiring a high quality 70V/100V loudspeaker.

WHERE YOU CAN FIND US



HOSPITALITY



CORPORATE



RETAIL



EDUCATION



HOUSES OF WORSHIP




IN-CEILING SPEAKERS

Sonance Professional Series In-Ceiling Speakers feature a bezel-less grille design and optional square grilles ensuring minimal visual intrusion, whilst also matching design cues of lighting and decor. Sonance's Laminated Core Transformer combined with state-of the-art driver design deliver best-in-class fidelity and uncompromised sonic performance in 70V/100V.

CLEAN LOOK. CLEAN SOUND.



- UL 1480 and UL 2043 certified
- Euroblock connector with loop through
- Sonance Laminated Core Transformer for uncompromised sonic performance in 70V/100V
- Heavy-duty voice coils for reliability and longevity
- High excursion Polypropylene woofer for effortless bass response
- Pivoting 1" soft dome chambered tweeter to direct sound for accurate coverage
- Magnetic grille retention for easy installation

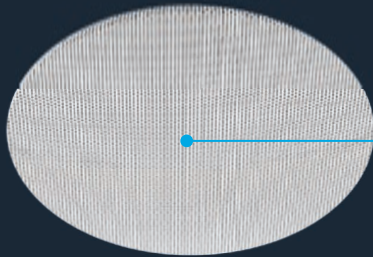


One-piece bezel-less grille
(Also available in black)



Optional square adapter with black or white grille, provides aesthetic to match lighting and decor.


SPECIFICATIONS

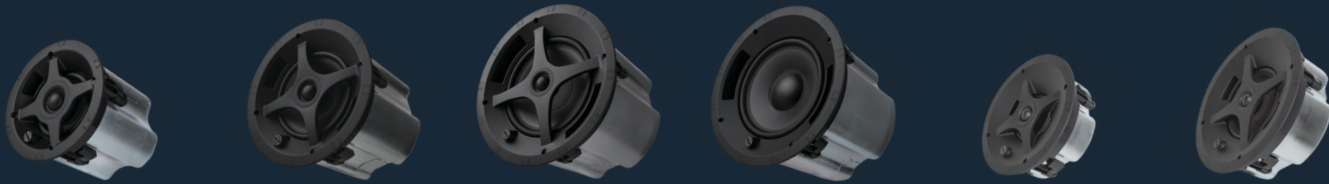

| | PS-C43RT | PS-C63RT | PS-C83RT | PS-C83RWT | PS-C43RTL (LOW PROFILE) | PS-C63RTL (LOW PROFILE) |
|------------------------|---|---|---|---|---|---|
| Tweeter | 1" (25mm) cloth dome, pivoting | 1" (25mm) cloth dome, pivoting | 1" (25mm) cloth dome, pivoting | N/A | 1" (25mm) cloth dome, pivoting | 1" (25mm) cloth dome, pivoting |
| Woofer | 4" (100mm) poly cone, rubber surround | 6.5" (165mm) poly cone, rubber surround | 8" (203mm) poly cone, rubber surround | 8" (203mm) poly cone, rubber surround | 4" (100mm) poly cone, rubber surround | 6.5" (165mm) poly cone, rubber surround |
| Frequency Range +/-3dB | 75Hz - 20kHz | 65Hz - 20kHz | 55Hz - 20kHz | 50Hz - 150Hz | 75Hz - 20kHz | 65Hz - 20kHz |
| Power Handling RMS | 60W program, 30W pink noise | 120W program, 60W pink noise | 160W program, 80W pink noise | 300W program, 150W pink noise | 60W program, 30W pink noise | 120W program, 60W pink noise |
| Sensitivity (2.83V/1m) | 87dB | 91dB | 91dB | 89dB | 87dB | 91dB |
| Transformer Taps | 30W, 15W, 7.5W, (3.8W 70V), 8 Ohm | 60W, 30W, 15W, (7.5W 70V), 8 Ohm | 60W, 30W, 15W, (7.5W 70V), 8 Ohm | 120W, 60W, 30W, (15W 70V), 8 Ohm | 30W, 15W, 7.5W, (3.8W 70V), 8 Ohm | 60W, 30W, 15W, (7.5W 70V), 8 Ohm |
| Impedance | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal |
| Termination | Removable locking clip-in connector | Removable locking clip-in connector | Removable locking clip-in connector | Removable locking clip-in connector | Removable locking clip-in connector | Removable locking clip-in connector |
| Included Accessories | C-ring & tile bridge, cutout template, white grille | C-ring & tile bridge, cutout template, white grille | C-ring & tile bridge, cutout template, white grille | C-ring & tile bridge, cutout template, white grille | C-ring & tile bridge, cutout template, white grille | C-ring & tile bridge, cutout template, white grille |
| Dimensions (Dia x D) | 6.3" x 7.01" (160mm x 178mm) | 9.13" x 8.86" (232mm x 225mm) | 11.06" x 9.84" (281mm x 250mm) | 11.06" x 9.84" (281mm x 250mm) | 9.13" x 3.43" (232mm x 87mm) | 11.06" x 4.37" (281mm x 111mm) |
| Cut out diameter | 5.875" (149mm) | 8.25" (210mm) | 10.125" (257mm) | 10.125" (257mm) | 8.25" (210mm) | 10.125" (257mm) |
| Certifications | UL 1480, UL 2043, NFPA90 & NFPA70; S7232 | UL 1480, UL 2043, NFPA90 & NFPA70; S7232 | UL 1480, UL 2043, NFPA90 & NFPA70; S7232 | UL 1480, UL 2043, NFPA90 & NFPA70; S7232 | UL 1480, UL 2043, NFPA90 & NFPA70; S7232 | UL 1480, UL 2043, NFPA90 & NFPA70; S7232 |

Colors and Shapes

PERFORMANCE AND VALUE.

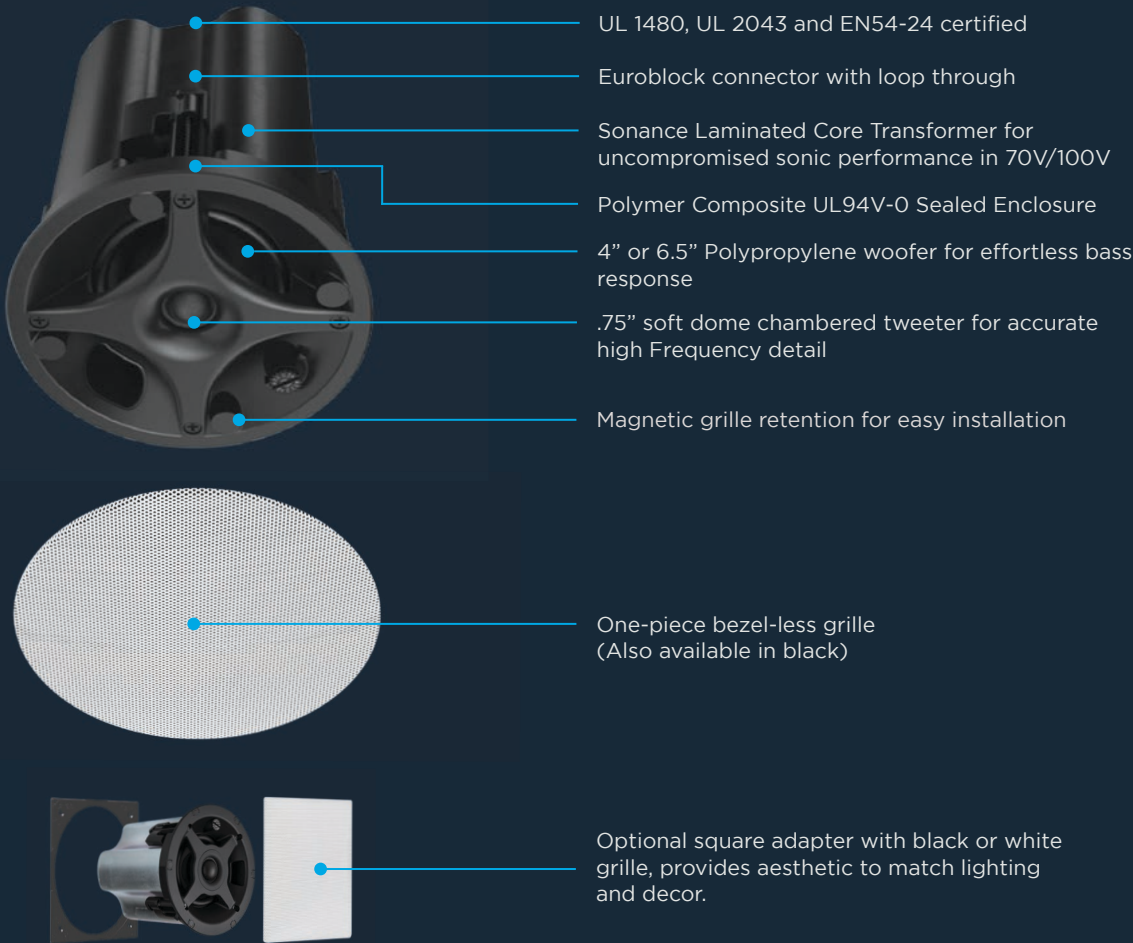

SPECIFICATIONS

| | PS-C41RT | PS-C61RT |
|------------------------|---|---|
| Tweeter | .75" (19mm) cloth dome | .75" (19mm) cloth dome |
| Woofer | 4" (165mm) poly cone, rubber surround | 6.5" (203mm) poly cone, rubber surround |
| Frequency Range +/-3dB | 95Hz - 20kHz | 83Hz - 20kHz |
| Power Handling RMS | 60W program, 30W pink noise | 100W program, 50W pink noise |
| Sensitivity (2.83V/1m) | 87dB | 91dB |
| Transformer Taps | 25W, 12.5W, 6.25W, (3.125W 70V), 8 Ohm | 32W, 16W, 8W, (4W 70V), 8 Ohm |
| Impedance | 8 Ohms nominal | 8 Ohms nominal |
| Termination | Removable locking clip-in connector | Removable locking clip-in connector |
| Included Accessories | C-ring & tile bridge, cutout template, white grille | C-ring & tile bridge, cutout template, white grille |
| Dimensions (Dia x D) | 6.3" x 6.5" (160mm x 165mm) | 9.13" x 8.86" (232mm x 225mm) |
| Cut out diameter | 5.875" (149mm) | 8.25" (210mm) |
| Certifications | UL 1480, UL 2043, NFPA90 & NFPA70; S7232, EN54-24 | UL 1480, UL 2043, NFPA90 & NFPA70; S7232, EN54-24 |

Colors and Shapes


*Available Mid 2022



PENDANT SPEAKERS

Sonance Professional Series Pendant Speakers utilize a minimalistic design similar to pendant lighting to blend discreetly into the environment. Sonance's Laminated Core Transformer combined with state-of the-art driver design delivers best-in-class fidelity and uncompromised sonic performance in 70V/100V.

THE MINIMALIST APPROACH.

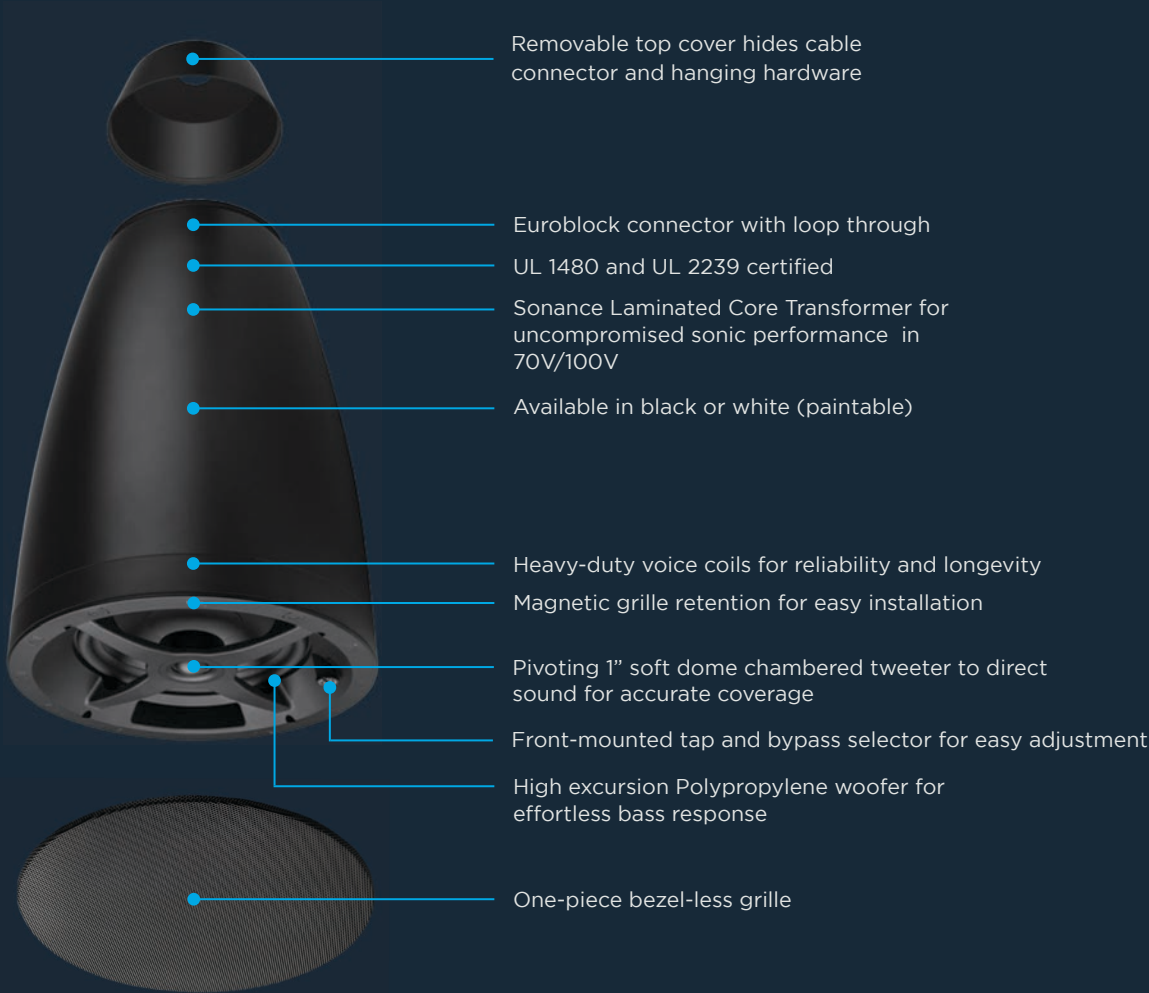

SPECIFICATIONS



| | PS-P43T | PS-P63T | PS-P83T | PS-P83WT |
|------------------------|---|---|---|---|
| Tweeter | 1" (25mm) silk dome, pivoting | 1" (25mm) silk dome, pivoting | 1" (25mm) silk dome, pivoting | N/A |
| Woofer | 4" (100mm) poly cone, rubber surround | 6.5" (165mm) poly cone, rubber surround | 8" (203mm) poly cone, rubber surround | 8" (203mm) poly cone, rubber surround |
| Frequency Range +/-3dB | 75Hz - 20kHz | 65Hz - 20kHz | 55Hz - 20kHz | 50Hz - 125Hz |
| Power Handling RMS | 60W program, 30W pink noise | 150W program, 75W pink noise | 200W program, 100W pink noise | 300W program, 150W pink noise |
| Sensitivity (2.83V/1m) | 87dB | 88dB | 90dB | 89dB |
| Transformer Taps | 30W, 15W, 7.5W, (3.8W 70V), 8 Ohm | 60W, 30W, 15W, (7.5W 70V), 8 Ohm | 60W, 30W, 15W, (7.5W 70V), 8 Ohm | 120W, 60W, 30W, (15W 70V), 8 Ohm |
| Impedance | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal |
| Termination | Removable locking clip-in connector | Removable locking clip-in connector | Removable locking clip-in connector | Removable locking clip-in connector |
| Attachment | One point, top surface | One point, top surface | One point, top surface | One point, top surface |
| Included Accessories | 2 x suspension cable, Gripple connector, zip ties | 2 x suspension cable, Gripple connector, zip ties | 2 x suspension cable, Gripple connector, zip ties | 2 x suspension cable, Gripple connector, zip ties |
| Dimensions (WxD) | 6.3" x 11" (160mm x 280mm) | 9.13" x 15.6" (232mm x 396mm) | 11.06" x 19.7" (281mm x 500mm) | 11.06" x 19.7" (281mm x 500mm) |
| Certifications | UL 1480, UL 2239 | UL 1480, UL 2239 | UL 1480, UL 2239 | UL 1480, UL 2239 |

Colors



SURFACE MOUNT SPEAKERS

Sonance Professional Series Surface Mount Speakers feature Sonance's Fast-Mount® bracket and front cable connection to speed up the installation process and provide a minimalistic appearance. Sonance's Laminated Core Transformer combined with state-of the-art driver design delivers best-in-class fidelity and uncompromised sonic performance in 70V/100V.

BLEND INTO THE DECOR.



- UL1480 and UL2239
- 1" soft dome chambered tweeter for clean and accurate high-end detail
- Heavy-duty voice coils for reliability and longevity
- High excursion Polypropylene woofer for effortless bass response
- Available in black or white (Paintable)
- Corrosion-resistant powder-coated aluminum grille
- Sonance Laminated Core Transformer for uncompromised sonic performance in 70V/100V
- Front-mounted connector with cover for rapid connection and to keep terminals out of elements
- Front-mounted tap and bypass select for easy adjustment
- Euroblock connector with loop through
- Sonance's FastMount bracket system with simple push and lock process for faster installation
- IPX-4 weather-resistant, high impact construction for indoor or outdoor use

SPECIFICATIONS

| | PS-S43T | PS-S53T | PS-S63T | PS-S83T | PS-S83WT |
|------------------------|--|--|--|--|--|
| Tweeter | 1" (25mm) cloth dome, pivoting | 1" (25mm) cloth dome, pivoting | 1" (25mm) cloth dome, pivoting | 1" (25mm) cloth dome, pivoting | N/A |
| Woofer | 4" (100mm) poly cone, rubber surround | 5.25" (130mm) poly cone, rubber surround | 6.5" (165mm) poly cone, rubber surround | 8" (203mm) poly cone, rubber surround | 8" (203mm) poly cone, rubber surround |
| Frequency Range +/-3dB | 75Hz - 20kHz | 70Hz - 20kHz | 65Hz - 20kHz | 55Hz - 20Hz | 50Hz - 150kHz |
| Power Handling RMS | 60W program, 30W pink noise | 90W program, 45W pink noise | 120W program, 60W pink noise | 160W program, 80W pink noise | 200W program, 125W pink noise |
| Sensitivity (2.83V/1m) | 87dB | 88dB | 88dB | 90dB | 89dB |
| Transformer Taps | 30W, 15W, 7.5W, (3.8W 70V), 8 Ohm | 30W, 15W, 7.5W, (3.8W 70V), 8 Ohm | 60W, 30W, 15W, (7.5W 70V), 8 Ohm | 60W, 30W, 15W, (7.5W 70V), 8 Ohm | 120W, 60W, 30W, (15W 70V), 8 Ohm |
| Impedance | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal |
| Termination | Front locking clip-in connector | Front locking clip-in connector | Front locking clip-in connector | Front locking clip-in connector | Front locking clip-in connector |
| Attachment | FastMount Adjustable Bracket | FastMount Adjustable Bracket | FastMount Adjustable Bracket | FastMount Adjustable Bracket | FastMount Adjustable Bracket |
| Dimensions (WxHxD) | 5.47" x 9.25" x 4.8" (139mm x 235mm x 122mm) | 6.36" x 10.08" x 5.68" (162mm x 256mm x 144mm) | 7.51" x 12.14" x 6.86" (191mm x 309mm x 174mm) | 9.01" x 14.02" x 8.58" (229mm x 356mm x 218mm) | 9.01" x 14.02" x 8.58" (229mm x 356mm x 218mm) |
| Certifications | UL 1480, IPX4 | UL 1480, IPX4 | UL 1480, IPX4 | UL 1480, IPX4 | UL 1480, IPX4 |


Colors



SUBWOOFERS

The PS-S210SUBT features an extremely shallow design which allows it to be used in a wide range of specialty applications such as under restaurant booths and banquettes as well as mounted onto rafters, walls or ceilings with the optional C-bracket. Featuring Sonance's Laminated Core Transformer, the PS-S210SUBT can be driven on the same amplifier channel as the other full-range loudspeakers in a system.

BIG BASS THAT’S OUT OF SIGHT.

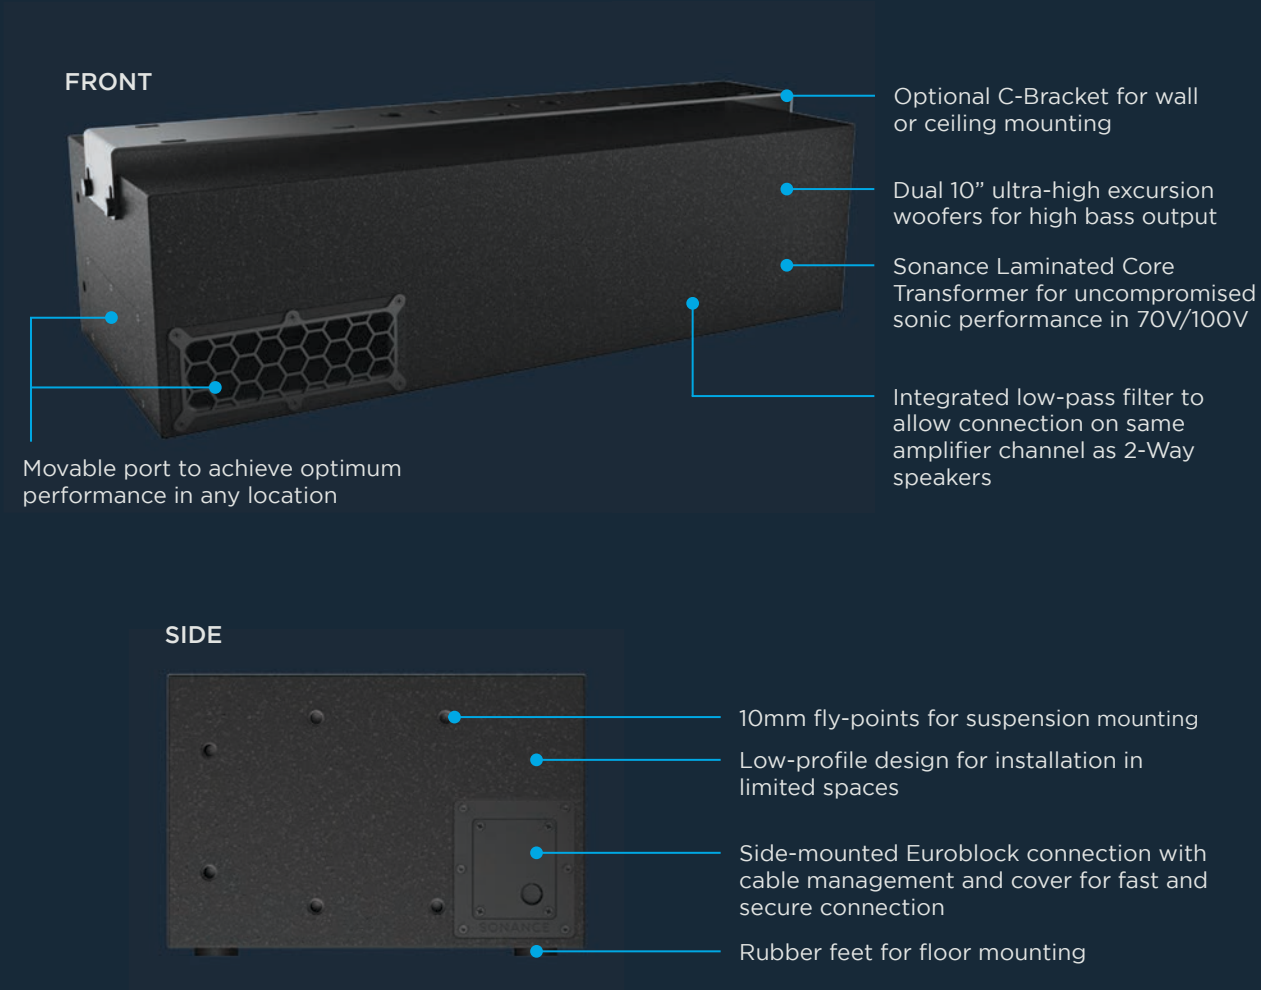

SPECIFICATIONS

PS-S210SUBT

| Frequency Range +/-3dB | Power Capacity | Sensitivity (2.83V/1m) | Coverage Angle |
|--|---|-----------------------------------|---|
| 44Hz - 132kHz | 500 Watts Continuous Program Power, 300 Watts Continuous Pink Noise | 94dB | 180 degrees conical coverage |
| Rated Maximum SPL | Impedance | Transformer Taps | Crossover Point |
| 121dB @ 1 meter (3.3 feet), 127dB peak | 4 Ohms nominal | 300W, 150W and (75W @70V), 8 Ohms | 150Hz low pass filter, 12dB/octave |
| Input Connectors | Dimension (WxHxD) | Net Weight | Shipping Weight |
| Four pin Euroblock with loop output connections | 33.00" x 8.98" x 13.78" (838mm x 228mm x 350mm) | 61 lbs (27.7kg) | 75.8 lbs (33.0kg) |
| LF Driver | Cabinet | Optional Accessories | Included Accessories |
| Dual 10" (254mm) Woven glass fiber cones, Butyl rubber surrounds | Polyurethane coated laminated plywood | C-Bracket | (4) M10 mounting bolts, installation manual |

Colors



SONANCE INVISIBLE SERIES

Invisible Speakers are the pinnacle of the Sonance “Designed to Disappear” strategy. After a multi-year development process, the all-new Motion Flex Invisible Series line incorporates new breakthroughs in installation and audio quality, and firmly entrenches Sonance as the unrivaled leader in discreet performance audio.

Sonance Invisible Series Speakers are perfect for luxury retail boutiques, hotels, and other high-end spaces that require best-in-class performance with zero visual intrusion.




INVISIBLE SERIES

Sonance award-winning Invisible Series Speakers are used exclusively in luxury retail boutiques around the world, including Louis Vuitton, Prada Fendi, Gucci, Tom Ford, Valentino, Tiffany's, Burberry and Miu Miu. Sonance's Laminated Core Transformer for full-fidelity in 70V/100V, combined with best-in-class sonic performance, and the most flexible installation processes makes them the perfect solution for projects requiring high-quality audio combined with zero visual intrusion.

INTRODUCING MOTION FLEX TECHNOLOGY.

Technology that is out of sight, but not out of mind.

The new Sonance Invisible Series, featuring Motion Flex Technology, offers a suite of advancements in invisible speaker engineering that together delivers unparalleled sonic performance and redefines what is possible from an invisible speaker.

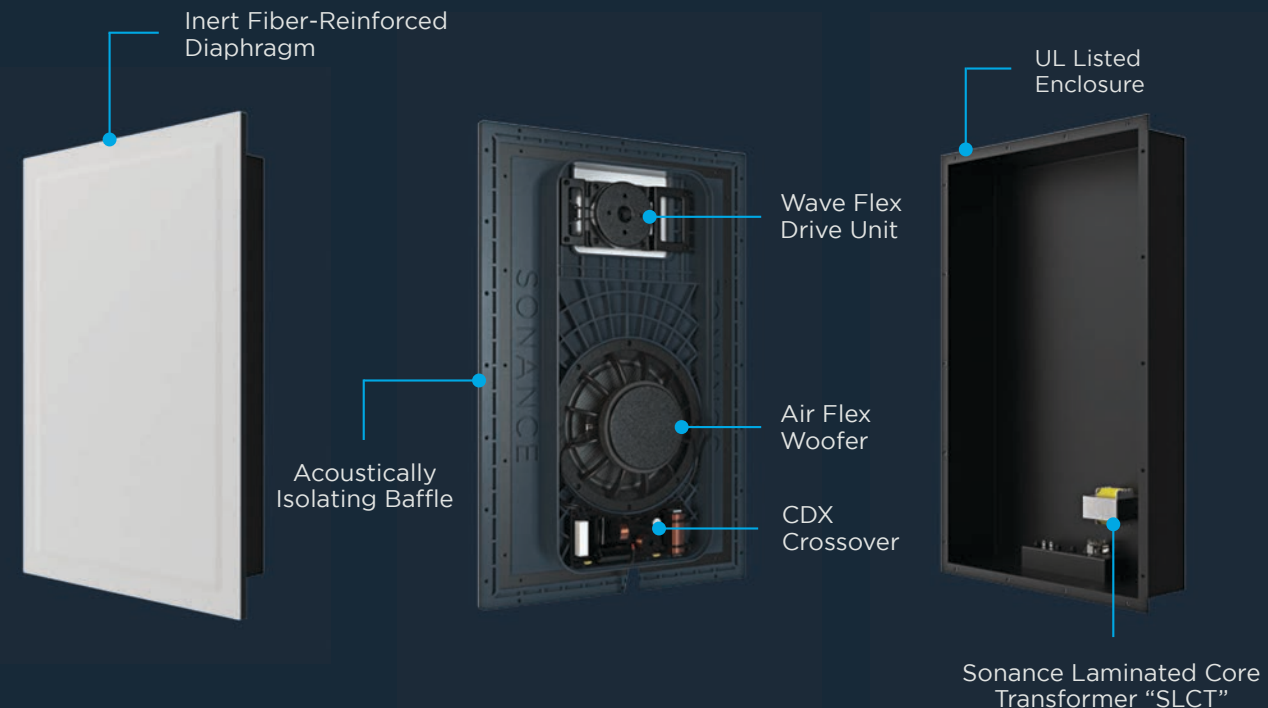

WAVE FLEX DRIVE UNIT

This high-bandwidth midrange and high-frequency transducer drive unit propagates sound via a bending-wave principle, delivering velvety-smooth mids and crystal-clear highs while enabling a lower crossover point to facilitate high fidelity listening.

AIR FLEX WOOFER

By coupling a glass-fiber woofer to our acoustically inert diaphragm via a pocket of air, the active diaphragm area moves like a piston. The result is robust and powerful bass that defies expectations and delivers unsurpassed sonic quality.

ACOUSTICALLY ISOLATED Baffle

The diaphragm is split into two active areas that are completely isolated. This prevents the bending motion of the Wave Flex Drive Unit from interfering with the pistonic motion of the Air Flex Woofer, enabling ultra-low distortion and a level of sonic transparency not previously possible in invisible speakers.


CONSTANT DIRECTIVITY CROSSOVER (CDX)

Sonance's proprietary CDX crossover provides uniquely smooth off-axis frequency response, resulting in greater fidelity and coverage for each speaker. In the all new Invisible lineup, the CDX crossover allows for almost 180° of horizontal and vertical dispersion.

SONANCE LAMINATED CORE TRANSFORMER (SLCT)

The Sonance Laminated Core Transformer is built into the IS6T and IS8T to deliver distortion-free, wide-bandwidth audio for uncompromising performance in 70V/100V commercial applications.

OUT OF SIGHT, NOT OUT OF MIND.

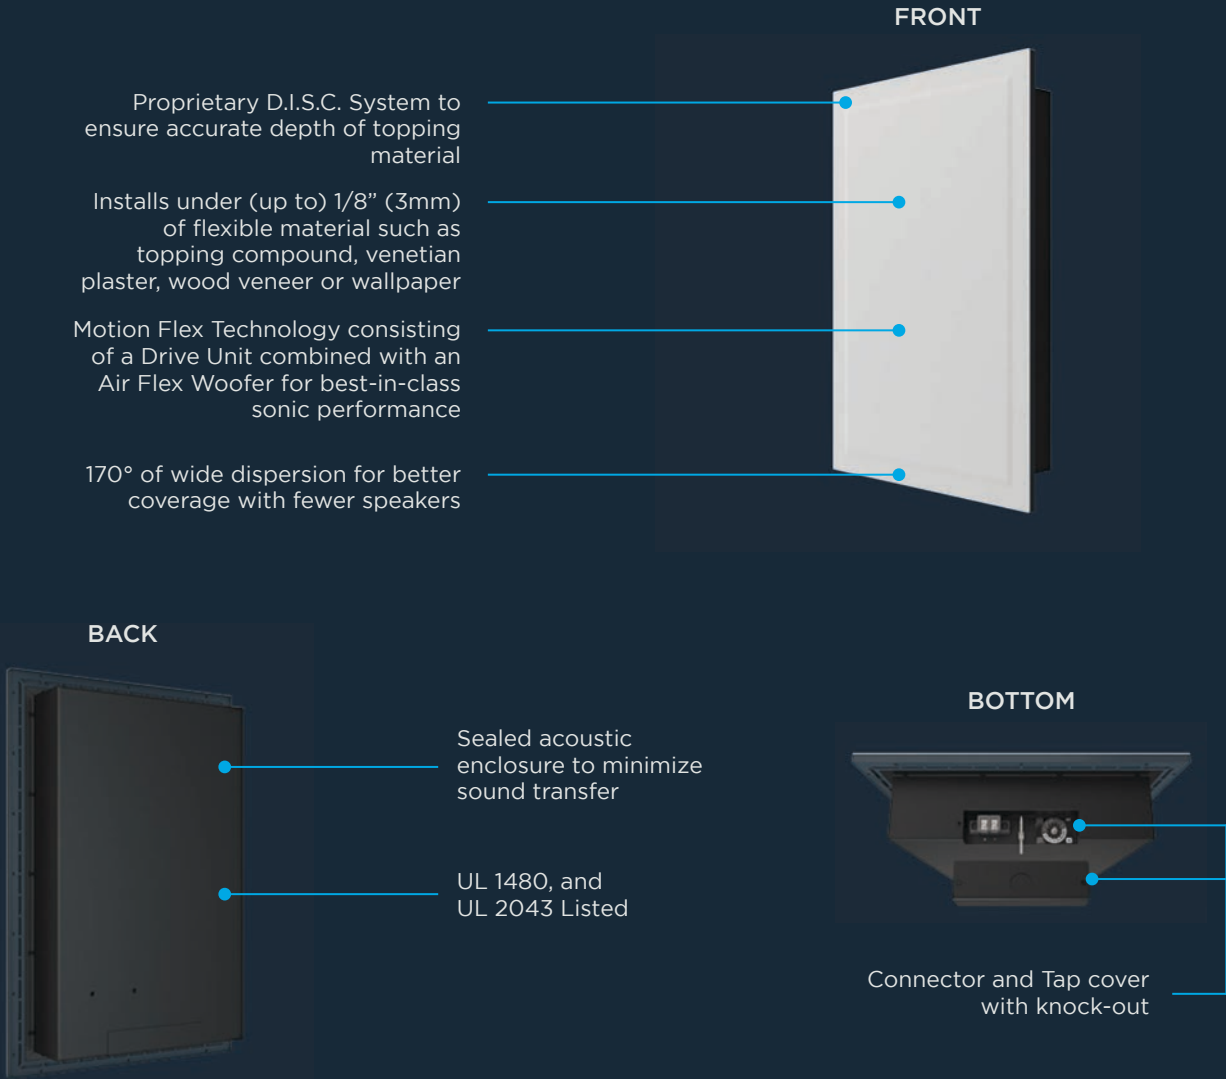

SPECIFICATIONS

IS6T

| Tweeter | Woofer | Frequency Range +/-3dB | |
|---|------------------------|---|--|
| Motion Flex Technology consisting of a Wave Flex Drive Unit with a 20in ² (127cm ²) bending wave diaphragm featuring a 1.75" (44mm) voicecoil. | | Air Flex Woofer with a 98in ² (633cm ²) air pulse diaphragm utilizing a 6" (165mm) carbon fiber woofer.. | 50Hz-30kHz |
| Transformer Taps | Impedance | Attachment | Dimensions (WxHxD) |
| 30W, 15W, 7.5W, (3.8W @ 70V), 4 Ohms | 4 Ohms nominal | Screw Terminals with strain relief | 16.10" x 16.10" x 3.86" (409mm x 409mm x 98mm) |
| Power Handling RMS | Sensitivity (2.83V/1m) | Certificationss | Weight |
| 100 Watts RMS | 84dB | UL 2043, UL 1480 | 18.41 lbs. (8.35 kg) per unit |

IS8T

| Tweeter | Woofer | Frequency Range +/-3dB | |
|---|------------------------|---|--|
| Motion Flex Technology, consisting of a Wave Flex Drive Unit with a 29in ² (188cm ²) bending wave diaphragm featuring a 1.75" (44mm) voice coil. | | Air Flex Woofer with a 191in ² (1234cm ²) air pulse diaphragm utilizing an 8" (203mm) carbon fiber woofer. | 40Hz - 30kHz |
| Transformer Taps | Impedance | Attachment | Dimensions (WxHxD) |
| 60W, 30W, 15W, (7.5W @ 70V), 4 Ohms | 4 Ohms nominal | Screw Terminals with strain relief | 16.10" x 24.13" x 3.86" (409mm x 613mm x 98mm) |
| Power Handling RMS | Sensitivity (2.83V/1m) | Certificationss | Weight |
| 160 Watts RMS | 86dB | UL 2043, UL 1480 | 25.24 lbs. (11.45kg) each |

SONANCE OUTDOOR AUDIO

Sonance Outdoor Audio solutions deliver Sonance's renowned combination of best-in-class sonic performance and aesthetics, whilst being designed and constructed to handle the harshest of conditions, including moisture, temperature extremes and salt air.




OMNI-6T

The Sonance OMNI-6T is an omnidirectional 70V/100V/8 Ohm loudspeaker, designed to deliver 360 degree coverage in applications such as resort gardens, hotel pool areas, theme parks and outdoor shopping malls. The OMNI-6T features a unique 2-way design, consisting of a high-excursion 6.5" Woofer and four x 1.25" Wide Band Drivers, providing best-in-class frequency response. Sonance's Laminated Core Transformer delivers uncompromised fidelity in 70V/100V. The textured dark brown enclosure is designed to blend into ground cover, garden beds and foliage.

360 DEGREES OF EXCELLENCE.



- Textured brown enclosure to camouflage among foliage and ground cover
- 360 degree dispersion delivers better coverage with less speakers
- Weatherproof construction designed to handle the most extreme outdoor conditions
- Buriable design to minimize visual intrusion

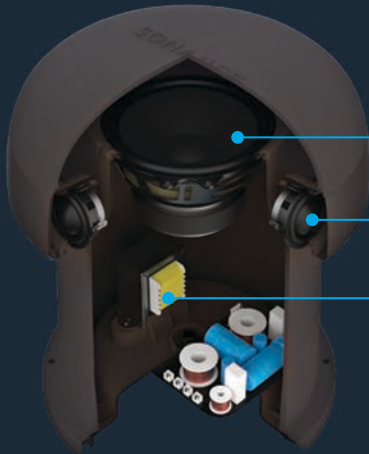

- 6.5" (165mm) high excursion woofer for extended bass response
- Four x 1.25" (32mm) wide-band drivers for best-in-class treble and midrange
- Sonance Laminated Core Transformer (SLCT) for uncompromised fidelity in 70V/100V

SPECIFICATIONS



| Frequency Range +/-3dB | Power Capacity | Sensitivity (2.83V/1m) | Coverage Angle |
|---|--|--------------------------------------|---|
| 60Hz - 20kHz | 120 Watts Continuous Program Power, 60 Watts Continuous Pink Noise | 88dB | 360 degrees horizontal, 160 degrees vertical |
| Rated Maximum SPL | Impedance | Transformer Taps | Crossover Point |
| 107dB @ 1 meter (3.3 feet) average, 133dB peak | 8 Ohms nominal | 80W, 40W, 20W and (10W @70V), 8 Ohms | 500Hz |
| LF Driver | Wide Band Driver | Input Connectors | Environmental |
| 6.5" (165mm) Polypropylene Cone, Santoprene Rubber Surround | Four 1.25" (32mm) EPDM Dome, Ferrofluid Cooled | Flying Leads | Conforms to Mil Spec 810 for Humidity, IEC 529, IP-66 |
| Included Accessories | Dimension H x Diameter | Weight | Color |
| Silicon Filled Wire Nuts | 14.5" x 12" (368mm x 305mm) | 14.60 lbs (6.62kg) each | Landscape Brown |



LANDSCAPE SERIES

Sonance Landscape Series is a 70V/100V outdoor audio system, consisting of small satellite speakers and a range of in-ground or hardscape subwoofers. The system delivers unequalled sonic performance, while the scalable design makes it a perfect solution for hotel, casino and resort gardens, amusement parks, wineries, golf courses, outdoor shopping malls or any large-scale area requiring perfectly even coverage of high quality sound.

LANDSCAPES MEET SOUNDSCAPES.

High-dispersion grille pattern for superior coverage

1" Tweeter

4.5" (115mm) or 6.5" (165mm) mid-low driver

Sonance Laminated Core Transformer (SLCT) for uncompromised fidelity in 70V/100V

Weatherproof construction with triple-sealed enclosures to handle the most extreme outdoor conditions

Various 70V/100V tap-settings, plus 8 Ohm bypass

Versatile mounting hardware options for ground, tree, and hard surfaces

Powdercoated metal canopy for longevity

Weatherproof low density Polyethylene (LDPE) construction to handle the most extreme outdoor conditions

Various 70V/100V tap-settings, plus 8 Ohm bypass

Sonance Laminated Core Transformer (SLCT) for uncompromised fidelity in 70V/100V

12" (305mm) or 15" (381mm) polypropylene cone with a Santoprene™ rubber surround drivers for deep and impactful bass response

Buri-able design to minimize visual impact

SPECIFICATIONS




| | LS4T SAT | LS6T SAT | LS12T SUB | LS15T SUB | HS12T SUB |
|------------------------|---|---|---|---|--|
| Tweeter | 1" (25mm) Polyurethane dome | 1" (25mm) Polyurethane dome | N/A | N/A | N/A |
| Woofer | 4 1/2" (114mm) Injection molded polypropylene cone with a Santoprene™ rubber surround | 6 1/2" (165mm) Injection molded polypropylene cone with a Santoprene™ rubber surround | 12" (305mm) polypropylene cone with a Santoprene™ rubber surround | 15" (381mm) polypropylene cone with a Santoprene™ rubber surround | 12" (305mm) polypropylene cone Santoprene™ rubber surround |
| Frequency Range +/-3dB | 75Hz - 20kHz | 55Hz - 20kHz | 22Hz - 100Hz | 20Hz - 100Hz | 22Hz - 100Hz |
| Transformer Taps | 40W, 20W, 10W, (5W 70V), 8 Ohms | 60W, 23W, 15W, (7.5W 70V), 8 Ohms | 300W, 150W, 75W, (38W 70V), 8 Ohms | 300W, 150W, 75W, (38W 70V), 8 Ohms | 300W, 150W, 75W, (38W 70V), 8 Ohms |
| Enclosure Material | High Heat ABS, non-corrosive sealed enclosure | High Heat ABS, non-corrosive sealed enclosure | Low density polyethylene (LDPE) | Low density polyethylene (LDPE) | Low density polyethylene (LDPE) |
| Weight | 6.28 lbs (2.85 kg) each | 10.75 lbs (4.88kgs) each | 70.55 lbs (32.0kg) each | 83.77 lbs (38.0kg) each | 64.14 lbs (30.0kg) each |



VP EXTREME

Sonance Visual Performance Extreme is a range of IP66 rated in-wall and in-ceiling speakers that can handle the rigors of extreme temperatures, moisture, steam, salt air, chlorine and even high winds, making them perfect for yachts, pool areas, steam rooms, saunas, and beach-side restaurants.

EXCEPTIONAL SOUND FOR
EXTREME CONDITIONS.



Engineered to handle extreme conditions (-30°F to 175°F / -34°C to 79°C)

Conforms to Mil-Std 810G for humidity, salt spray, temperature and UV, and IP66 waterproof rating

1"(25mm) polyurethane dome, Ferrofluid cooled, tweeter in acoustic back chamber

6 1/2" (165mm) or 8" (205mm) injection-molded polypropylene/graphite cone woofer, with integral Santoprene™ surround





XPC mechanical and magnetic grille retention designed to withstand shock, vibration and wind sheer

Powder-coated marine-grade stainless steel grille to avoid corrosion

Optional sealed acoustic enclosure

Optional square adapter with black or white grille, provides aesthetic to match lighting and decor.


SPECIFICATIONS



| | VPXT6 | VPXT6R | VPXT8R |
|------------------------|---|---|---|
| Tweeter | 1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber | 1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber | 1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber |
| Woofer | 6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround | 6 1/2" (165mm) Injection molded polypropylene cone with a Santoprene™ rubber surround | 8" (205mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround |
| Frequency Range +/-3dB | 45Hz - 20kHz | 45Hz - 20kHz | 40Hz - 20kHz |
| Impedance | 8 Ohms nominal | 8 Ohms nominal | 8 Ohms nominal |
| Sensitivity (2.83V/1m) | 89dB | 89dB | 90dB |
| Weight | 12 lbs (5.4 kg) pair | 12 lbs (5.4 kg) pair | 14 lbs (6.35kg) pair |

Colors and Shapes





| PS-60XF (Transformer) | |
|-----------------------|--|
| Transformer Taps | 300W, 150W, 75W, (30W @70V) |
| Lead Length | 24" (609mm) |
| Mounting | 2 x Mounting tabs |
| Dimensions | 3.52" W x 1.85" D x 2.01" H (89.4mm x 47mm x 51mm) |
| Weight | 1.19 lbs (540gm) each |

The PS-60XF features the Sonance Laminated Core Transformer to deliver uncompromised sonic performance in 70V/100V installations. It enables VP Extreme (or any other Sonance high performance 8 Ohm speaker) to be used in 70V/100V commercial applications. Sold separately.

ALSO FROM SONANCE

At Sonance, we believe that audio should sound superb; that is a given. We also believe that it should blend in with the design of a space, whether it is a commercial environment, a home, indoors or outdoors; loudspeakers should be an integral part of the aesthetic, in addition to providing excellent, comfortable listening enjoyment. Our wide range of 8 Ohm products offer not only best-in-class sonic performance, but also the flexibility to perfectly match almost any application.

SOUNDBARS

Sonance Soundbars offer a wide range of solutions that fit any flat panel display from 50" up to 85". Our fixed width soundbars provide a clean aesthetic while our adjustable width soundbars provide onsite adjustability, giving you the ability to perfectly match the width of any display.




VISUAL PERFORMANCE

Sonance Visual Performance Series features an award-winning low-profile grille that is paintable to blend into the wall or ceiling. With three shapes and sizes, several performance levels, and a range of specialty application speakers, a consistent look can be achieved for any application in every space.




SUBWOOFERS

Sonance has a Subwoofer to suit every audio visual application. The range of in-wall, in-ceiling and cabinet subwoofers allows you to design a system that fits the style and needs of your environment.

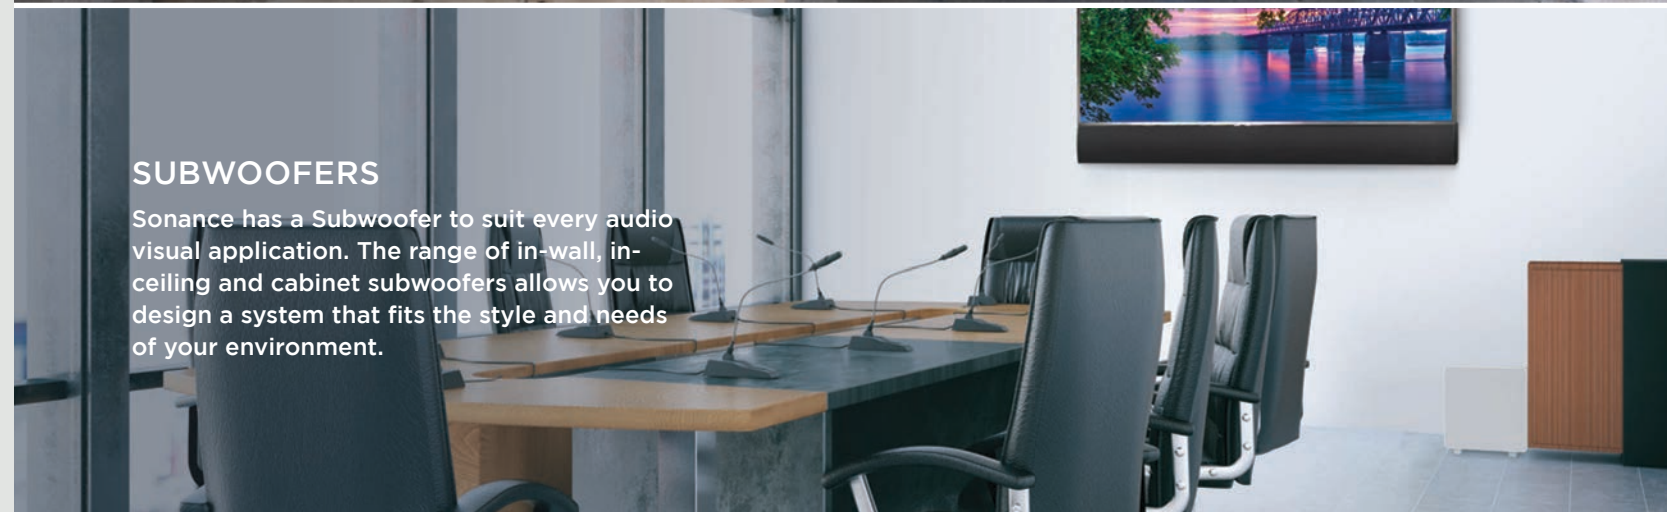


GARDEN SERIES

Sonance Garden Series borrows performance design elements from the industry-leading Sonance Landscape Series products and creates a smaller scale system ideal for outdoor areas up to 3,500 square feet (325 sq m). Sonance Garden Series is the perfect balance of performance and simplicity in an outdoor audio system.

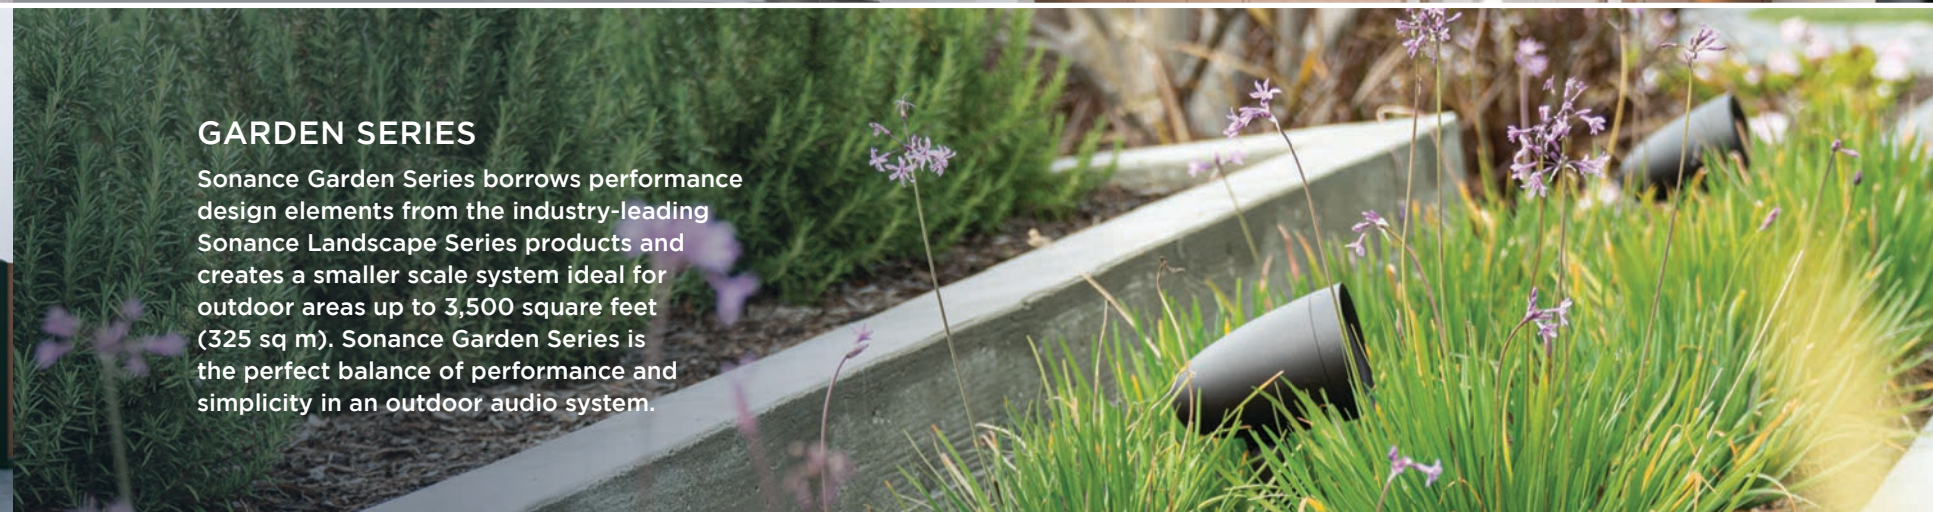


ARCHITECTURAL SERIES

Sonance Architectural Series delivers the ultimate blend of high performance and premium aesthetics. The totally flush and bezel-less grilles disappear into the surrounding ceiling surface while the state-of-the-art driver materials and cutting-edge design sets a new standard in audiophile sound quality.

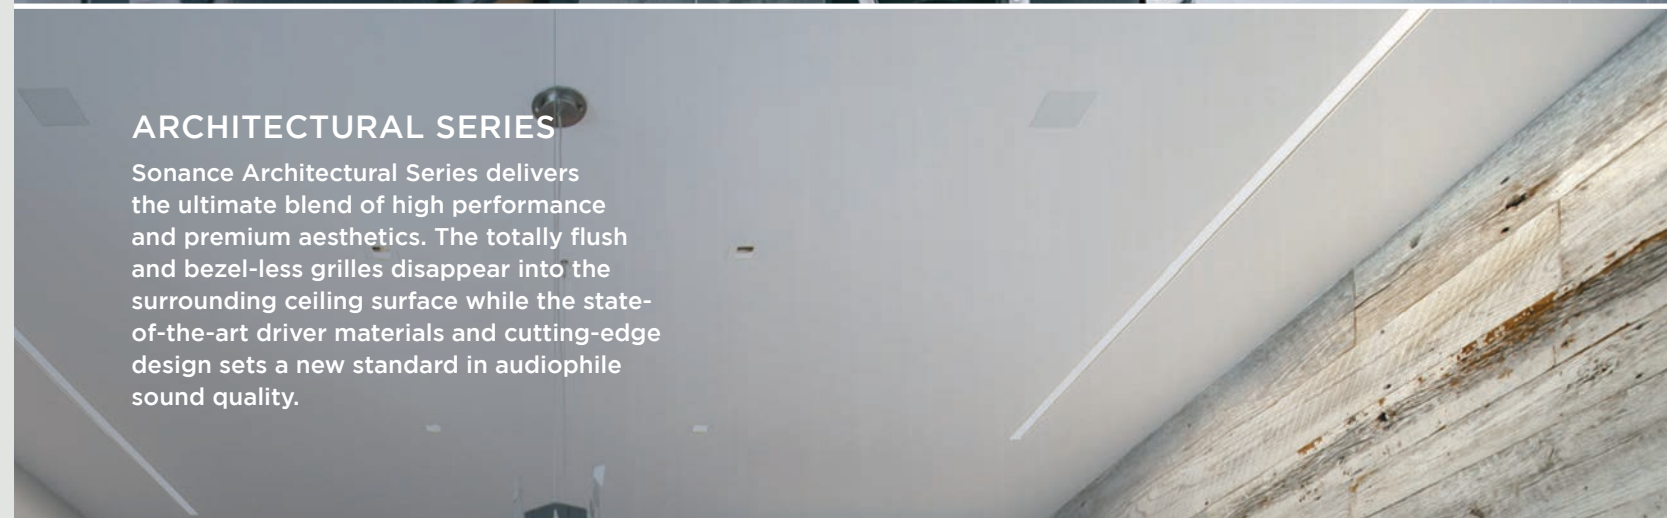

PATIO SERIES


Sonance Patio Series is an elegant outdoor all-weather audio system that blends into the surrounding landscape for an immersive music experience that emanates, seemingly, from everywhere.

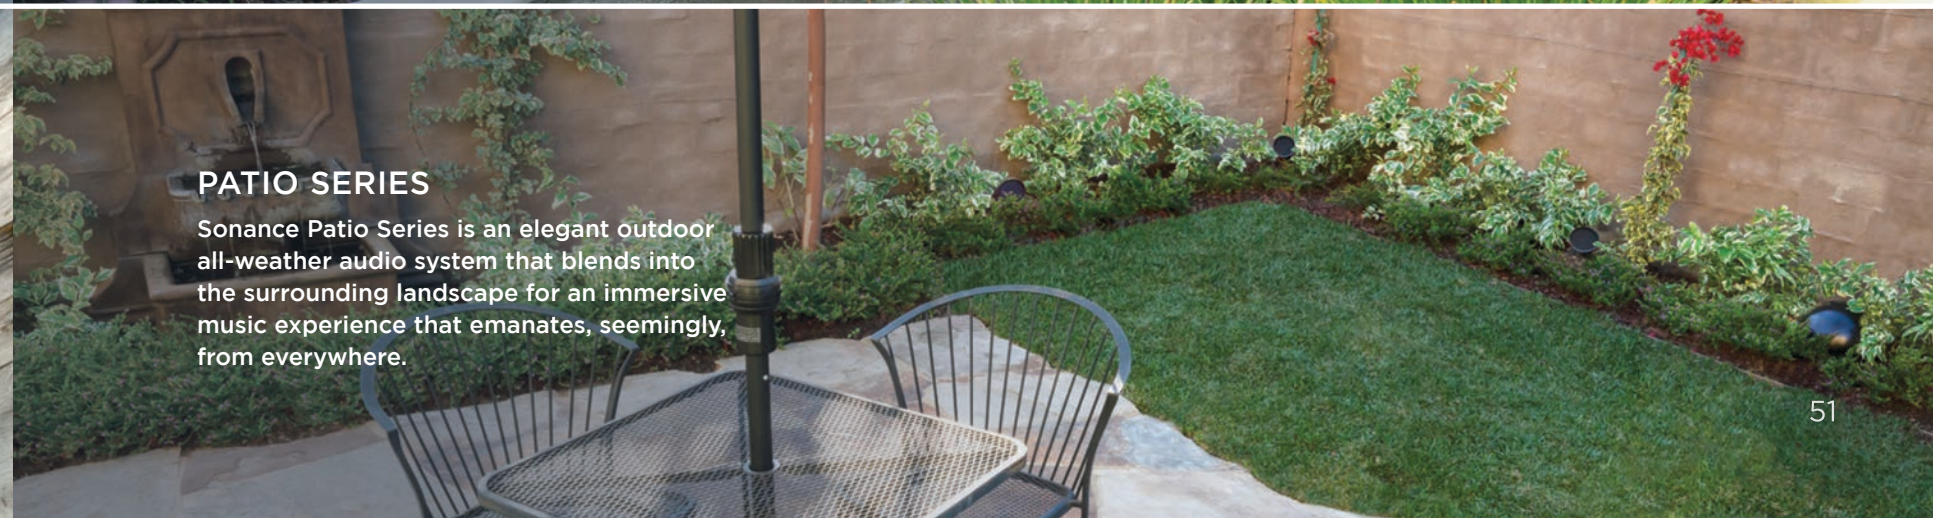



James Loudspeaker was founded in 1999 on the idea that combining a group of world-class audio engineers with a US-based manufacturing facility and a talented group of craftspeople could fundamentally change how audio could be incorporated into the most refined commercial projects.

Since inception, James Loudspeaker has amassed a catalog of over 10,000 different speaker designs and a modular construction process which allows a commercial integrator to adapt any product in the catalog to fit the design parameters or construction realities of any project.

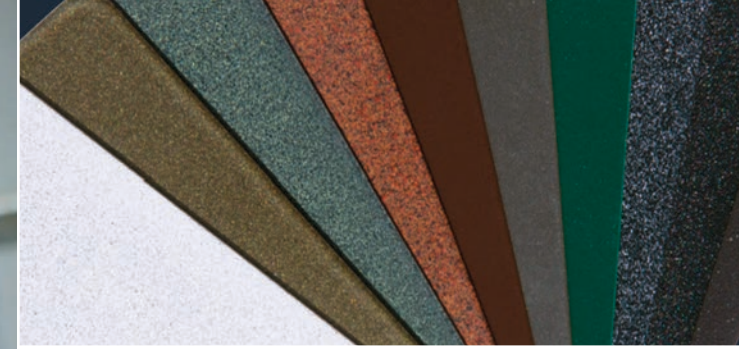

WIDE RANGE OF COLORS

At James Loudspeaker, we finish our products in a wide range of standard powder coating and paint colors. We also offer fully custom color matching to RAL or provided color samples.




CUSTOM FINISHES

We offer a unique range of custom finishes to allow our loudspeakers to disappear. This includes speaker grilles made from wood, stone or metal, and even methods like hydro-dipping which allow us to perfectly match almost any surface or pattern.



VARIOUS SHAPES AND SIZES

We can build custom loudspeaker solutions to solve your installation challenges. From changing the width of a Soundbar to match a display, to adjusting the dimensions of an enclosure to accommodate obstructions or construction-related surprises, to one-off completely custom products to integrate into a unique location - if you can dream it, we can build it.

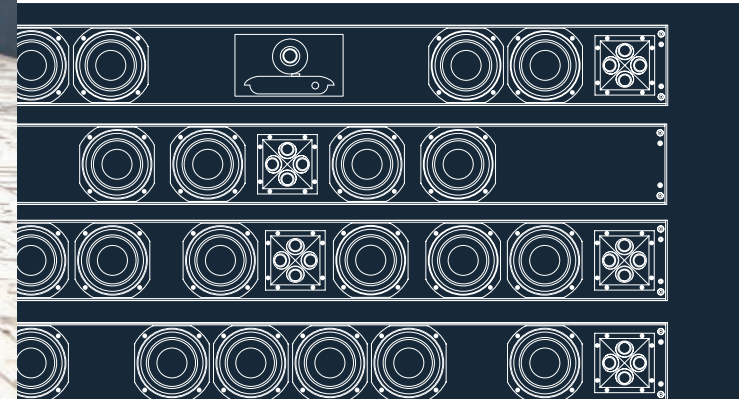

ANY CONFIGURATION

We utilize modular designs and construction processes to allow us to configure our products exactly as you need. From Soundbars in Mono, Stereo or LCR or with a space to hold a Camera, to specialized driver layouts for spaces requiring higher sound pressure levels, we can build exactly the right loudspeaker for each specific application.



70V/100V OPTION

Most of our products are available with a 70V/100V option. James uses high quality, wide bandwidth, low saturation, toroidal wound transformers that provided 20-20kHz response with extremely low levels of distortion.

UL-CERTIFIED


Many of our products are certified for UL2043 (standard fire test for heat and visible smoke release for discrete products installed in air-handling spaces - also known as plenums) and UL1480 (standard for speakers used for fire alarm, and emergency signaling).

MARINE-GRADE

James Loudspeaker offers a marine-grade option for most of the product line. Hardware is made from high grade galvanized 316 stainless steel which is then put through a specialized coating process. Electronic components are sealed, protecting them from moisture and corrosion. The result is outstanding reliability and longevity, even in the harshest environmental conditions.

FAST TURNAROUND

James Loudspeaker products are designed and built at our factory in Minden, Nevada. Our in-house engineering and state-of-the-art factory, combined with our modular design and unique construction processes allows us to go from ideation, to specification, to manufacturing with incredibly short lead times.

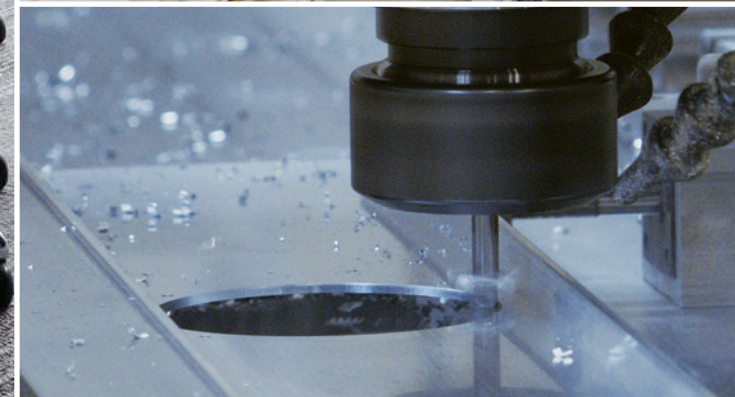



WEDGE SERIES

Wedge speakers are specialized all-terrain boundary application speaker systems for integration into a 90 degree corner, such as at 2 walls or a wall and ceiling. These models are constructed entirely of aircraft grade aluminum for strength, sonic performance, and durability, and include an aluminum perforated grille to provide years of trouble free use. In addition, all Wedge speakers are marine grade making them ideal for any indoor/outdoor installation. Available in 8 Ohms or optional 70V/100V.



SMALL APERTURE SERIES

James Loudspeaker has always sought to push the envelope when it comes to better solutions through innovation, and nothing reflects that commitment like our Small Aperture® (SA) Series. SA Series features an aircraft grade aluminum enclosure with a 3-way driver design that ports through either a 3" or 4" micro-trim grille - delivering full-range performance with minimal visual intrusion. Choose from a wide range of enclosure sizes and depths, performance levels, grille finishes and even custom configuration. Available in 8 Ohms or optional 70V/100V. UL 2043 and UL 1480 certified.



LANDSCAPE SERIES

James signature All-Terrain Series features a range of 2-Way Satellite Speakers in 3", 4", 6.5", combined with direct burial Subwoofers in 8", 10", 12", 15" and 21" to deliver perfectly even coverage at almost any SPL. All our landscape speakers use aircraft grade aluminum with a heavy powder coat for ultimate protection against even the harshest outdoor conditions. Available in 8 Ohms or 70V/100V.



SOUNDBAR

Our Soundbars are completely customized for every project to ensure that each and every client gets exactly what they're looking for. Ranging from low-profile with only 1.5 inch reveal to large format bars that integrate large woofers for maximum impact, to those with a dedicated camera space, there is a bar for every application. Each bar is custom fit to the display and includes custom mounting brackets to seamlessly integrate the bar for an elegant low-impact appearance. Models available in 8 Ohm passive and powered.



POWER PIPE

James Loudspeaker PowerPipe subwoofers were created to solve an age-old problem; how to fill a space with rich, detailed bass frequencies without interfering with décor. The PowerPipe utilizes a flexible tube to move bass energy from a hidden location into the listening space through a visually unassuming grille. These subwoofers use a durable, sealed aluminum enclosure that can be concealed just about anywhere, such as above a ceiling, nestled below in a sub-floor or even stowed away in a closet.



OMNI SERIES

James Omni Series features a range of omnidirectional loudspeakers for applications where 360 degree coverage is required such as outdoor dining or shopping areas or large patios. Available in 3 sizes with, or without planter options, the Omni Series provides outstanding performance and an elegant look. Available in 4 Ohms or 70V/100V.



I PORT

At IPORT, we believe in enhancing the utility of a dedicated-use tablet at work and at home by combining design, technology, and function so that you can experience iPad® in a whole new way.

HOLD. CHARGE. PROTECT. CONNECT. IPAD®


WHERE YOU CAN FIND US



CORPORATE



FOOD AND BEVERAGE

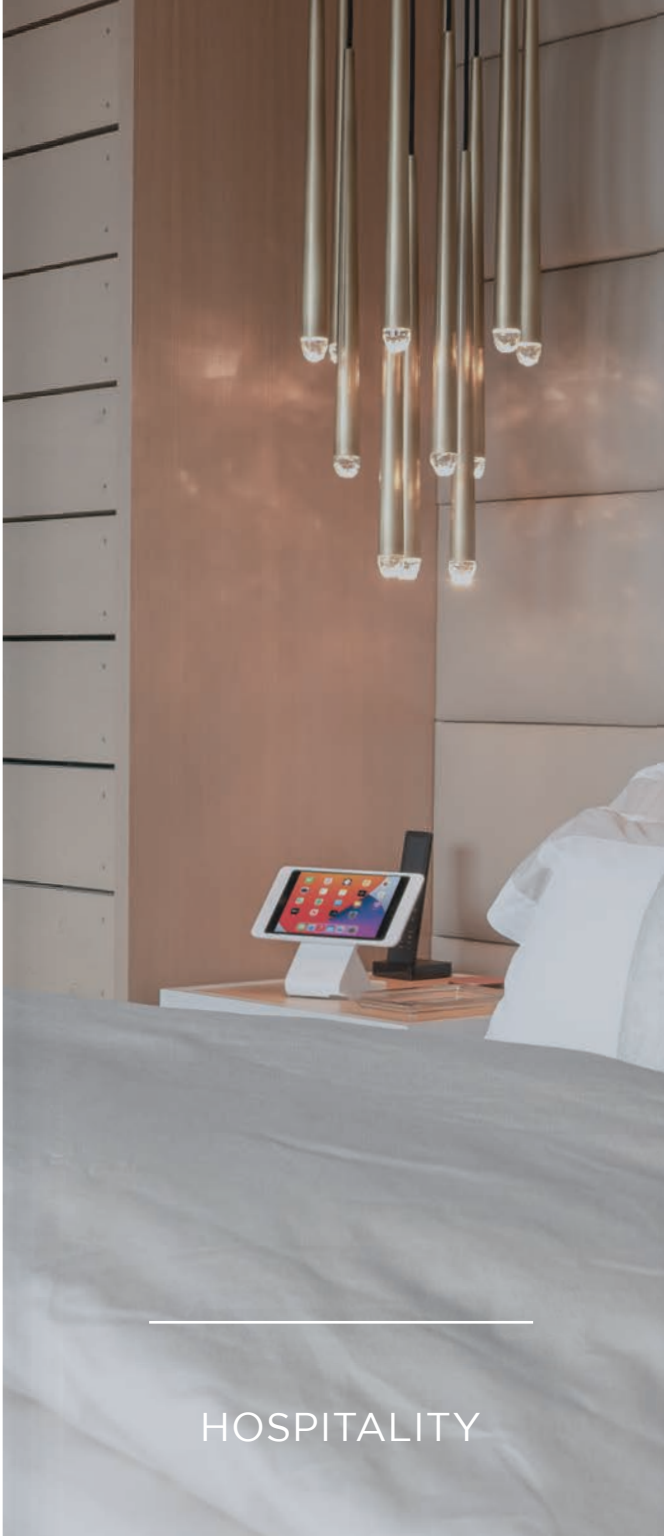

HOSPITALITY



RETAIL



HEALTHCARE



CONNECT PRO is the completely redesigned system for holding, charging, and protecting iPad. This direct replacement for IPORT LAUNCH includes the familiar components: BaseStation, WallStation, and Case, now with an optional CONNECT PoE+ Upgrade. The electrical charging enhancements and a uniquely modular design provide a powerful and more flexible charging capability that supports all iPad models, including iPad Pro.

FEATURES AND BENEFITS

- Wireless charging and magnetic mounting system for iPad
- Support for all lightning and USB-C iPad models
- Flexible power solutions to accommodate most power scenarios from 9-30v DC or PoE+
- Mount iPad on any wall or solid surface in portrait or landscape
- Integrated locking features for Case and Base create a complete secure solution
- Available in black and white



CASE

+



WALLSTATION

OR



BASESTATION

=



THE SYSTEM



SPECIFICATIONS

CASE

| | |
|--------|--|
| Depth | Mini (6th gen): TBD - 10.2 10.5-inch (8th - 9th gen): 0.81" (2.06 cm) Air (4th gen) Pro 11-inch (2nd - 3rd gen): 0.74" (1.88 cm) - Pro 12.9-inch (4th - 5th gen): 0.71" (1.8 cm) |
| Height | Mini (6th gen): TBD - 10.2 10.5-inch (8th - 9th gen): 11.33" (28.78 cm) Air (4th gen) Pro 11-inch (2nd - 3rd gen): 10.38" (26.37 cm) - Pro 12.9-inch (4th - 5th gen): 11.44" (29.06 cm) |
| Weight | Mini (6th gen): TBD - 10.2 10.5-inch (8th - 9th gen): 0.6 lbs (0.27 kg) Air (4th gen) Pro 11-inch (2nd - 3rd gen): 0.75 lbs (0.34 kg) - Pro 12.9-inch (4th - 5th gen): 0.69 lbs (0.31 kg) |
| Width | Mini (6th gen): TBD - 10.2 10.5-inch (8th - 9th gen): 7.01" (17.81 cm) Air (4th gen) Pro 11-inch (2nd - 3rd gen): 7.63" (19.38 cm) - Pro 12.9-inch (4th - 5th gen): 8.82" (22.4 cm) |

BASESTATION

| | |
|--------|---------------------|
| Depth | 7.01" (17.81 cm) |
| Height | 5.85" (14.86 cm) |
| Weight | 4.75 lbs. (2.15 kg) |
| Width | 3.48" (8.84 cm) |

WALLSTATION

| | |
|--------|---------------------|
| Depth | 0.78" (1.98 cm) |
| Height | 4.97" (12.62 cm) |
| Weight | 0.17 lbs. (0.08 kg) |
| Width | 4.97" (12.62 cm) |

CONNECT PRO CASE

72329 - iPad mini (6th gen) (Black)*
72330 - iPad mini (6th gen) (White)*
72300 - iPad 10.2-inch (8th - 9th gen) (Black)
72301 - iPad 10.2-inch (8th - 9th gen) (White)
72324 - iPad Pro 11-inch, Air (4th gen),
Pro 11-Inch (2nd - 3rd gen) (Black)*
72325 - iPad Pro 11-inch, Air (4th gen),
Pro 11-Inch (2nd - 3rd gen) (White)*
72326 - iPad 12.9-inch (4th - 5th gen) (Black)*
72327 - iPad 12.9-inch (4th - 5th gen) (White)*

*Available Mid 2022

CONNECT PRO BASESTATION

72352 - PRO BaseStation (Black)
72353 - PRO BaseStation (White)

CONNECT PRO WALLSTATION

72350 - PRO WallStation (Black)
72351 - PRO WallStation (White)

CONNECT PRO ACCESSORIES

72106 - PoE+ Injector
72109 - PoE+ Upgrade*
72302 - Handstrap (Black)



IPORT LUXE

IPORT LUXE is the premium wireless charging and mounting system for iPad designed for charging on table-top or on-wall. With its minimalist design and premium finishes, IPORT LUXE blends iPad into the design of any space.

FEATURES AND BENEFITS

- Dock and charge iPad wirelessly in portrait or landscape, on a table or wall
- Precision machined aluminum components for refined and minimalist aesthetic
- Integrated security feature locks case and base to any solid surface
- Power via USB power supply or standard PoE
- Available in black, white, and silver



Colors ● ● ●





SPECIFICATIONS

CASE

| | |
|--------|--|
| Depth | 10.2-inch (8th - 9th gen): 0.6" (1.52 cm) |
| Height | 10.2-inch (8th - 9th gen): 11.5" (29.21 cm) |
| Weight | 10.2-inch (8th - 9th gen): 0.4 lbs (0.18 kg) |
| Width | 10.2-inch (8th - 9th gen): 7.3" (18.54 cm) |

BASESTATION

| | |
|--------|---------------------|
| Depth | 6.1" (15.49 cm) |
| Height | 4.9" (12.45 cm) |
| Weight | 1.26 lbs. (0.57 kg) |
| Width | 5" (12.7 cm) |

WALLSTATION

| | |
|--------|---------------------|
| Depth | 2.4" (6.1 cm) |
| Height | 3.3" (8.38 cm) |
| Weight | 0.18 lbs. (0.08 kg) |
| Width | 3.3" (8.38 cm) |

LUXE CASE

- 71015 - iPad 10.2-inch (8th - 9th gen) (Black)
- 71016 - iPad 10.2-inch (8th - 9th gen) (Silver)
- 71017 - iPad 10.2-inch (8th - 9th gen) (White)

LUXE BASESTATION

- 71000 - BaseStation (Black)
- 71001 - BaseStation (Silver)
- 71002 - BaseStation (White)

LUXE WALLSTATION

- 71003 - WallStation (Black)
- 71004 - WallStation (Silver)
- 71005 - WallStation (White)

LUXE ACCESSORIES

- 71006 - Wall Adapter Kit (Black)
- 71007 - Wall Adapter Kit (Silver)
- 71008 - Wall Adapter Kit (White)
- 71019 - USB Charge Module (Silver)
- 71020 - USB Charge Module (White)
- 71020 - USB Power Supply (Black)
- 71022 - Lightning Cable 0.25m (Black)
- 71023 - USB Power Supply (White)



I|PORT SURFACE MOUNT

I|PORT Surface Mount is the most elegant way to mount iPad on a wall or solid surface while maintaining complete access to the iPad power button, microphones and speakers. Available in black, silver or white finishes, Surface Mount ensures iPad blends into your space while keep it charged and protected.

FEATURES AND BENEFITS

- Precision machined aluminum components for refined and minimalist aesthetic
- Option to hardwire iPad to network using Apple or 3rd party networking adapters for original Surface Mount form factor
- Install iPad on drywall or any solid surface
- Lock iPad to wall using included security features
- Power via standard PoE or PoE+
- Available in black, white, and silver



Colors   

NEW SURFACE MOUNT SYSTEM DESIGN



+



BEZEL + POE+ ADAPTER
AIR (4TH GEN) | PRO 11-INCH
PRO 12.9-INCH (4TH - 5TH GEN)

POE+ INJECTOR
(OPTIONAL)

ORIGINAL SURFACE MOUNT FORM FACTOR



+



+



BEZEL
10.2 (8TH - 9TH GEN)

POE SPLITTER
(SOLD SEPARATELY)

POE INJECTOR
(OPTIONAL)



SPECIFICATIONS

BEZEL

| | |
|--------|---|
| Depth | 10.2-inch (8th - 9th gen): 0.5" (1.27 cm) - Air (4th gen) Pro 11-inch (2nd - 3rd gen): 0.44" (1.11 cm) Pro 12.9-inch (4th - 5th gen): 0.44" (1.11 cm) |
| Height | 10.2-inch (8th - 9th gen): 7.3". (18.54 cm) - Air (4th gen) Pro 11-inch (2nd - 3rd gen): 7.44" (18.89 cm) Pro 12.9-inch (4th - 5th gen): 8.88" (22.54 cm) |
| Weight | 10.2-inch (8th - 9th gen): 0.42 lbs. (0.19 kg) - Air (4th gen) Pro 11-inch (2nd - 3rd gen): 1.25 lbs. (0.57 kg) Pro 12.9-inch (4th - 5th gen): 1.56 lbs" (0.71 kg) |
| Width | 10.2-inch (8th - 9th gen): 11.5" (29.21 cm) - Air (4th gen) Pro 11-inch (2nd - 3rd gen): 11.44" (29.05 cm) Pro 12.9-inch (4th - 5th gen): 12.75" (32.39 cm) |

NEW SURFACE MOUNT SYSTEM

Includes Surface Mount Bezel and CONNECT PoE+ Adapter

- 70752 - iPad 12.9-inch (4th - 5th gen) (Black)
- 70754 - iPad 12.9-inch (4th - 5th gen) (White)
- 70755 - iPad Pro 11, Air (4th gen) (Black)
- 70756 - iPad Pro 11, Air (4th gen) (White)

- 70805 - iPad mini (6th gen) (Black)*
- 70806 - iPad mini (6th gen) (White)*

ORIGINAL SURFACE MOUNT BEZEL

- 70722 - iPad mini 5th gen & mini 4 (Black)
- 70723 - iPad mini 5th gen & mini 4 (Silver)
- 70724 - iPad mini 5th gen & mini 4 (White)
- 70796 - iPad 10.2-inch (8th - 9th gen) (Black)
- 70797 - iPad 10.2-inch (8th - 9th gen) (Silver)
- 70798 - iPad 10.2-inch (8th - 9th gen) (White)

SURFACE MOUNT ACCESSORIES

- 70718 - PoE Splitter
- 70719 - PoE Injector
- 72102 - PoE+ Adapter**
- 72106 - PoE+ Injector**

*Shipping Mid 2022
**Compatible with New Surface Mount System and USB-C iPads



©2021 Sonance. All rights reserved. Sonance, James Loudspeaker and IPORT are registered trademarks.

Due to continuous product improvement, all features and specifications are subject to change without notice.
For the latest Sonance product specification information visit our website: www.sonance.com

Sonance • 991 Calle Amanecer • San Clemente, CA 92673 USA
12.08.2021 | 338064